



Thaco Trailers

QUAD-AXLE DROP DECK SEMI-TRAILER CARGO OR CONTAINER TRANSFER



TECHNICAL SPECIFICATION		
Overall dimension	mm	16,740 x 3,330 x 3,140
Wheelbase	mm	10,880 + 1,220 + 1,220 + 1,220
Tare weight	kg	13,300
Design pay load	kg	51,400
Design total mass	kg	64,800
Main beam dimension	mm	Welded beam 520/180
Axle	FUWA 13 tons	
Kingpin	3.5" (ø90), bolted connection	
Landing gear	FUWA 28 tons	
Twist locks	10	
Suspension system	Suspension system	Mechanical Suspension – FUWA
	Leaf spring	10 leaf springs (90x16 mm)
Control valve	WABCO	
Brake system	Locked on 4 axles	
Electrical system	10 – 30V (suitable for all tractor types)	
Tire size	285/70R19.5	
Paint technology	Shot blasting SA 2.5 Primer Topcoat	
Paint color (upon request)	Paint color (upon request)	

The product is covered by a 36-month warranty (details outlined in the accompanying warranty booklet) and can be serviced at any authorized THACO AUTO dealership nationwide.

**THACO INDUSTRIES TRAILERS AND HEAVY STEEL STRUCTURES
MANUFACTURING LIMITED LIABILITY COMPANY**

📍 THACO Chu Lai IP, Nui Thanh District, Quang Nam Province, Vietnam
☎ 0938 901 260 📧 thacosv@thaco.com.vn



www.thacotrailers.com

DURABLE - SAFE - ECONOMICAL

Thaco Trailers continuously invests in advanced technologies to create superior and reliable products.



CHASSIS

Modern design, advanced manufacturing technology, high-strength alloy steel material, solid structure, increased load capacity with high stability



AXLE

FUWA 13-ton axle.



SUSPENSION SYSTEM

The suspension system uses 10 leaf springs system with high durability and large load capacity, ensuring smooth operation.



ELECTRICAL SYSTEM

High-quality LED lighting system capable of withstanding harsh weather conditions, using 10-30V power source compatible with all types of tractors.




TIRES

Uses 285/70R19.5 tires.



BRAKE SYSTEM

4-axle air brake system with WABCO splitter valve to help prevent tire slippage when braking, ensuring safe operation.

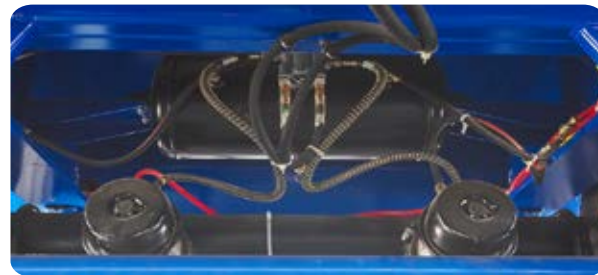


CHÂN CHỐNG

FUWA landing gear with a dynamic load capacity of 28 tons and a static load capacity of 80 tons, helps to effectively distribute weight, preventing excessive pressure on each structure of the semi-trailer.



DIMENSIONS

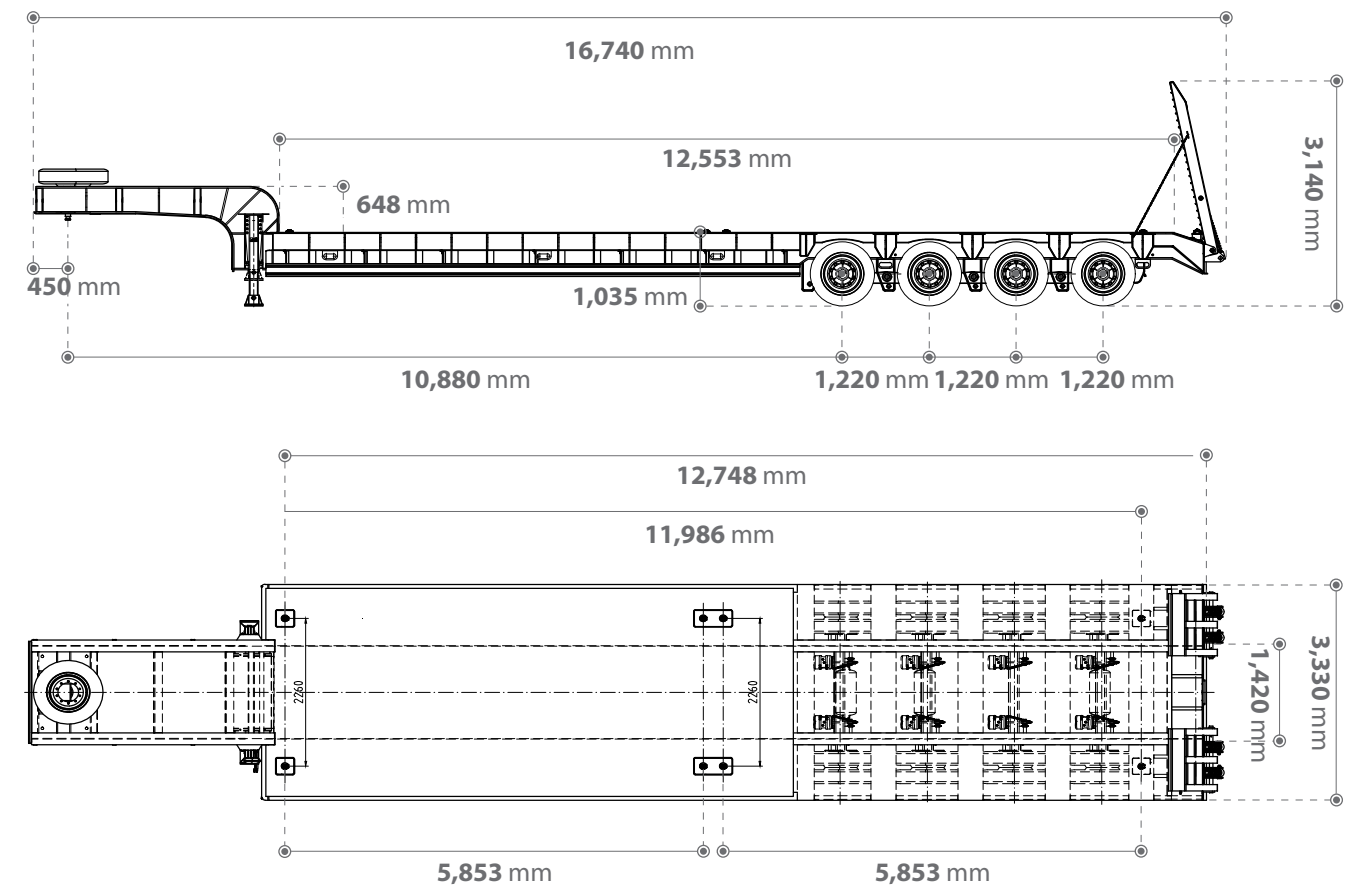

CARGO CAPACITY

